
IPC-B140HA-LU(F)C
4 MP Smart Hybrid Light Fixed Bullet Network Camera



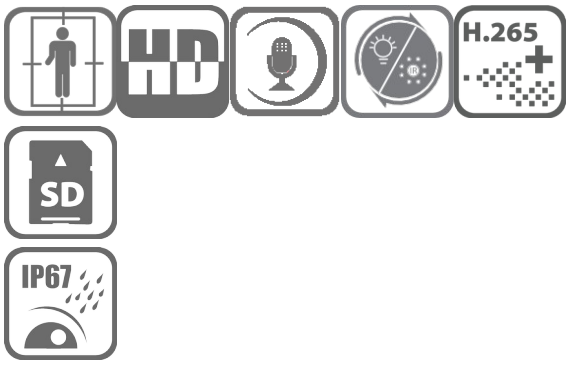

- High quality imaging with 4 MP resolution
- Support Human Detection
- Efficient H.265+ compression technology
- Smart Hybrid Light: advanced technology with long range coverage
- Built-in microphone for real-time audio security
- -F model supports on-board storage up to 512 GB (SD card slot)
- Water and dust resistant (IP67)

▪ Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	2560 × 1440
Min. Illumination	Color: 0.01 Lux @ (F2.2, AGC ON),B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°,tilt: 0° to 90°,rotate: 0° to 360°
Lens	
Lens Type	Fixed focal lens, 2.8 and 4 mm optional
Focal Length & FOV	2.8 mm, horizontal FOV 104°, vertical FOV 57°, diagonal FOV 123° 4 mm, horizontal FOV 82°, vertical FOV 45°, diagonal FOV 98°
Lens Mount	M12
Iris Type	Fixed
Aperture	F2.2
Depth of Field	2.8 mm: 0.9 m to ∞ 4 mm: 1.1 m to ∞
DORI	
DORI	2.8 mm, D: 53 m, O: 21 m, R: 10 m, I: 5 m 4 mm, D: 67 m, O: 26 m, R: 13 m, I: 6 m
Illuminator	
Supplement Light Type	IR,White Light
Supplement Light Range	IR: up to 20 m White Light: up to 15 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 20 fps (2560 × 1440), 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 20 fps (2560 × 1440), 24 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (1280 × 720, 640 × 480, 640 × 360) 60 Hz: 24 fps (1280 × 720, 640 × 480, 640 × 360)
Video Compression	Main stream: H.265+/H.265/H.264+/H.264, Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile,Main Profile,High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR,VBR
Region of Interest (ROI)	1 fixed region for main stream
Audio	
Audio Type	Mono sound
Audio Sampling Rate	8 kHz/16 kHz
Environment Noise Filtering	Yes

Audio Compression	G.711ulaw/AAC-LC
Audio Bit Rate	64 Kbps (G.711ulaw)/16 to 64 Kbps (AAC-LC)
Network	
Protocols	TCP/IP, ICMP, DHCP, DNS, HTTP, RTP, RTCP, RTSP, NTP, IGMP, IPv4, IPv6, UDP, QoS, SNMP, DDNS
API	IPC-B140HA-LU(F)C:With -F model: ONVIF (Profile S, Profile T, Profile G), ISAPI, SDK Without -F model: ONVIF (Profile S, Profile T), ISAPI, SDK IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):ONVIF (Profile S, Profile T, Profile G),ISAPI,SDK IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:ONVIF (Profile S, Profile T),ISAPI,SDK
Security	Password protection, complicated password, watermark, basic and digest authentication for HTTP, WSSE and digest authentication for Open Network Video Interface, security audit log, host authentication (MAC address)
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Client	iVMS-4200,HiLookVision
Web Browser	Local service: Chrome 80+, Firefox 80+, Edge 89+, IE 11
Image	
Image Settings	Saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser
Wide Dynamic Range (WDR)	Digital WDR
SNR	≥ 52 dB
Privacy Mask	1 programmable polygon privacy mask
Day/Night Switch	Day,Night,Auto,Schedule
Image Enhancement	BLC,HLC,3D DNR
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	IPC-B140HA-LU(F)C:-F model: Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD: NA IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Built-in Microphone	Yes,1 built-in microphone
Reset Key	IPC-B140HA-LU(F)C:-F model supports IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:NA IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):Yes
Event	
Basic Event	Motion detection (support alarm triggering by specified target type (human)), exception

Linkage	IPC-B140HA-LU(F)C:Upload to memory card (-F model supports), send email, notify surveillance center, trigger recording (-F model supports), trigger capture IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):Upload to memory card, send email, notify surveillance center, trigger recording, trigger capture IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:Send email, notify surveillance center, trigger capture
General	
Power	IPC-B140HA-LU(F)C:LU model: 12 VDC ± 25%, 0.42 A, max. 5 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 0, max. 6.5 W LUFC model: 12 VDC ± 25%, 0.42 A, max. 5 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, max. 6.5 W IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:12 VDC ± 25%, 0.42 A, max. 5 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 0, max. 6.5 W IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):12 VDC ± 25%, 0.42 A, max. 5 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, max. 6.5 W
Material	Plastic
Dimension	IPC-B140HA-LU(F)C:With -F model: 172.9 mm × 66.9 mm × 69.1 mm (6.81" × 2.63" × 2.72") Without -F model: 138.8 mm × 60.9 mm × 57.9 mm (5.5" × 2.4" × 2.3") IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):172.9 mm × 66.9 mm × 69.1 mm (6.81" × 2.63" × 2.72") IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:138.8 mm × 60.9 mm × 57.9 mm (5.5" × 2.4" × 2.3")
Package Dimension	IPC-B140HA-LU(F)C:With -F model: 216 mm × 121 mm × 118 mm (8,5" × 4.8" × 4.6") Without -F model: 163 mm × 75 mm × 75 mm (6.4" × 3.0" × 3.0") IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:163 mm × 75 mm × 75 mm (6.4" × 3.0" × 3.0") IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配): 216 mm × 121 mm × 118 mm (8,5" × 4.8" × 4.6")
Weight	IPC-B140HA-LU(F)C:With -F model: 250 g (0.55 lb.) Without -F model: Approx. 175 g (0.4 lb.) IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):Approx. 250 g (0.55 lb.) IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:Approx. 175 g (0.4 lb.)

With Package Weight	IPC-B140HA-LU(F)C:With -F model: Approx. 450 g (0.99 lb.) Without -F model: Approx. 250 g (0.55 lb.) IPC-B140HA-LUFC(2.8mm)(HiLook 标配),IPC-B140HA-LUFC(4mm)(HiLook 标配):Approx. 450 g (0.99 lb.) IPC-B140HA-LUC(2.8mm)(HiLook 标配),IPC-B140HA-LUC(4mm)(HiLook 标配),IPC-B140HA-LUC(2.8mm)(BRA STD)CKD:Approx. 250 g (0.55 lb.)
Storage Conditions	-30 °C to 45 °C (-22 °F to 113 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 45 °C (-22 °F to 113 °F). Humidity 95% or less (non-condensing)
Language	English, Ukrainian
General Function	Heartbeat,anti-banding,mirror,password protection,password reset via email
Approval	
EMC	CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, KC: KN32: 2015, KN35: 2015
Safety	CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013

▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	**Description**
Top-level protection	Hikvision pr

	oductsatthislevelareequippedforuseinareaswhereepr

	ofessionalanti-corrosionprotectionisamust.Typicalapplic

	cationscenariosincludecoastlines,docks,chemicalpla

	nts, and more.
Moderate protection	Hikvision products at this level are equipp

	edforuseinareaswithmoderateanti-corrosiondemandsT

	typical application scenarios include coastal areas about

	2 k il o m e t e r s (1 . 2 4 m il e s) a w a y f r o m c o a s tl i n e s , a s w e ll a s a

	reasaffectedbyacidrain.
No specific protection	Hikvisionproductsatthislevel

	l a r e e q u i p p e d f o r u s e i n a r e a s w h e r e n o s p e c i fi c a n ti - c o r r

	osi on pr ot ec ti on is ne ed ed .

▪ Available Model

IPC-B140HA-LUFC(2.8mm)

IPC-B140HA-LUFC(4mm)

IPC-B140HA-LUC(2.8mm)


IPC-B140HA-LUC(4mm)

IPC-B140HA-LUC(2.8mm)(TW Galaxy)

IPC-B140HA-LUC(4mm)(TW Galaxy)

IPC-B140HA-LUC(2.8mm)CKD

▪ Dimension

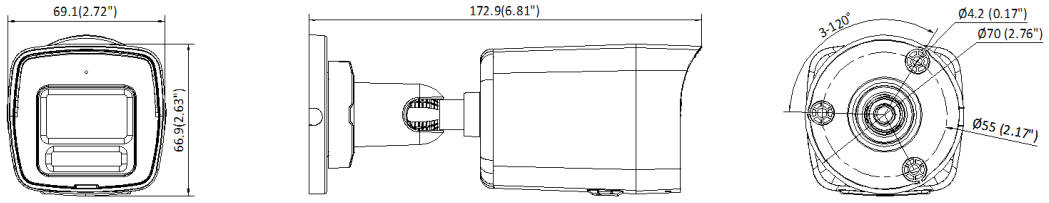



Unit: mm (inch)

▪ Accessory

▪ Optional

DS-1280ZJ-XS	DS-1276ZJ-SUS	DS-1275ZJ-SUS
		

▪ Installation Methods

Junction Box DS-1280ZJ-XS	Corner Mounting DS-1276ZJ-SUS+DS-1280ZJ-XS	Vertical Pole Mounting DS-1275ZJ-SUS+DS-1280ZJ-XS
		

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HiLook