



Connect like you're there

Dell 27 Video Conferencing Monitor
P2724DEB



The world's # 1 monitor company*



* Dell monitors are #1 Worldwide for 9 years! Source: IDC Worldwide Quarterly PC Monitor Tracker, Q2 2023. From 2014 to 2023.

Connect like you're there



World's first 27-inch QHD video conferencing monitor certified for both Microsoft Teams and Zoom.¹

Effortless collaboration

Look your best, always, with an intelligent webcam that includes a 2K QHD Sony STARVIS™ sensor. Experience automatic focus, light adjustments, enhanced visual clarity. Communicate clearly with integrated dual array echo cancellation mics and two 5W speakers.

Easier connections

Secure interactions with automatic camera disable and get to work fast with Dell ExpressSign-in that senses when you are close and signs you in via Windows Hello. Launch Team meetings effortlessly on this Certified for Microsoft Teams monitor.

Peak productivity

Streamline your workspace with a USB-C Hub monitor that connects you to the Ethernet and a host of other devices.

¹ Based on internal analysis, June 2023.

Communicate clearly with optimally positioned built-in echo cancellation mics and two 5W speakers.

Amazing visual clarity
See consistent, vibrant colors of up to 1.07b of 99% sRGB across seamless, wide viewing angles enabled by In-Plane Switching (IPS) technology.

Launch Team meetings effortlessly by pressing the touch controls on this Certified for Microsoft Teams monitor.

Connect like you're there

Look great always with an intelligent webcam that includes a 2K QHD Sony STARVIS™ sensor and multi-element lens to deliver crystal clear images.

Adjust to your comfort

Tilt, swivel, pivot and height adjustable (150mm max).

Connect two PC sources and multitask efficiently with **Auto KVM**. Plus, enhance efficiency by adding a second monitor via the **daisy chain** feature.

Connect to multiple devices with **USB-C** (up to 90W power delivery), **RJ45** (Ethernet), **super speed USB 5Gbps** and **quick access** ports.

Built-in **ComfortView Plus** reduces harmful blue light emissions without compromising color.


Environmental standards
ENERGY STAR®, TCO Certified Edge, EPEAT® Gold registered.



► View the Dell 27 Video Conferencing Monitor – P2724DEB in 360°

Peak productivity with multitasking features

Stretch productivity and multitask efficiently with built-in KVM.

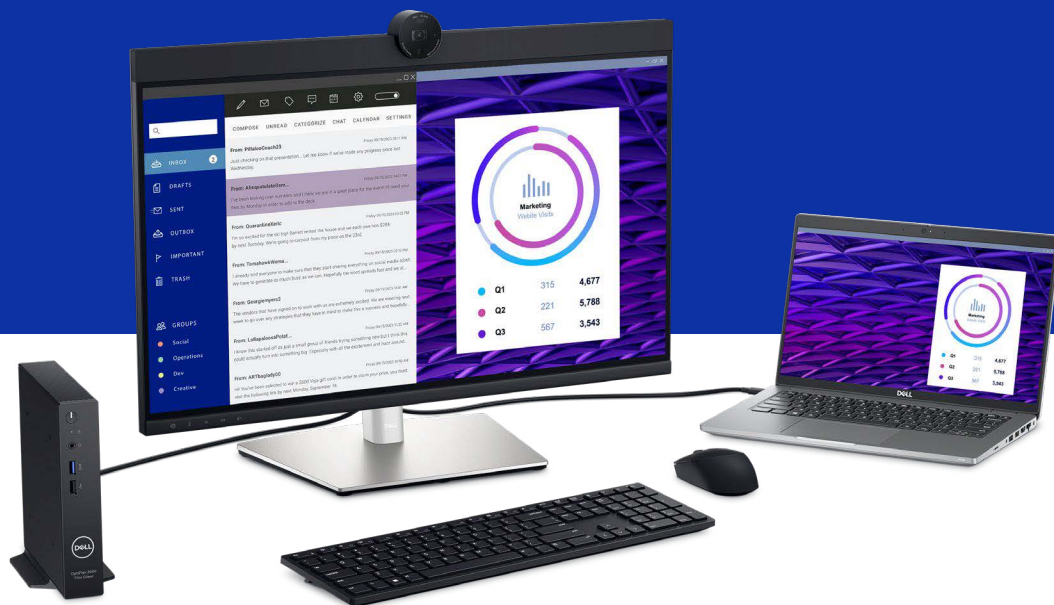

Multitask better

Connect to two PC sources and Auto KVM will seamlessly switch controls over to the second connected PC. Use KVM (keyboard, video and mouse) to control both PCs with a single mouse and keyboard.



Expand your productivity

Enhance efficiency by adding a second monitor via Dell Express Daisy Chaining through DisplayPort connectivity.

Designed for you

This stylish video conferencing monitor fits both home and office environments.



Designed with purpose


The small base and elegant cable management system hides cords within the monitor riser.

Easy-to-use


Navigate the onscreen menu and adjust settings with a convenient joystick control.

Work comfortably

Experience made-for-you comfort by tilting, swiveling, pivoting and adjusting the height of your monitor (150mm max).

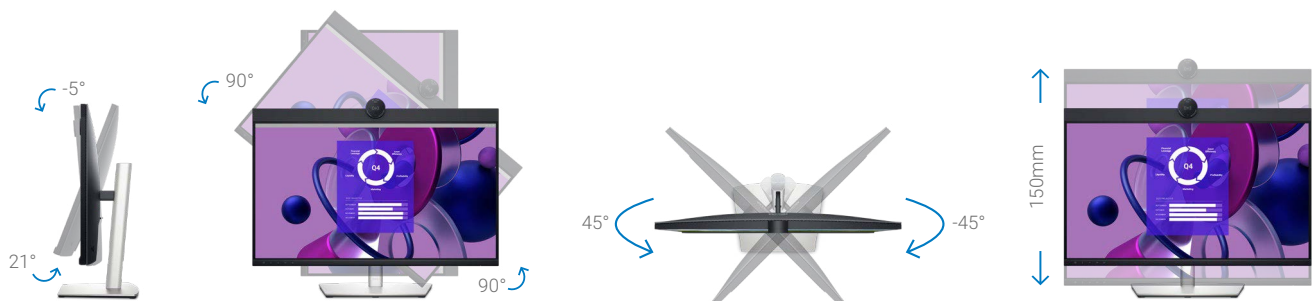

Ports & Slots

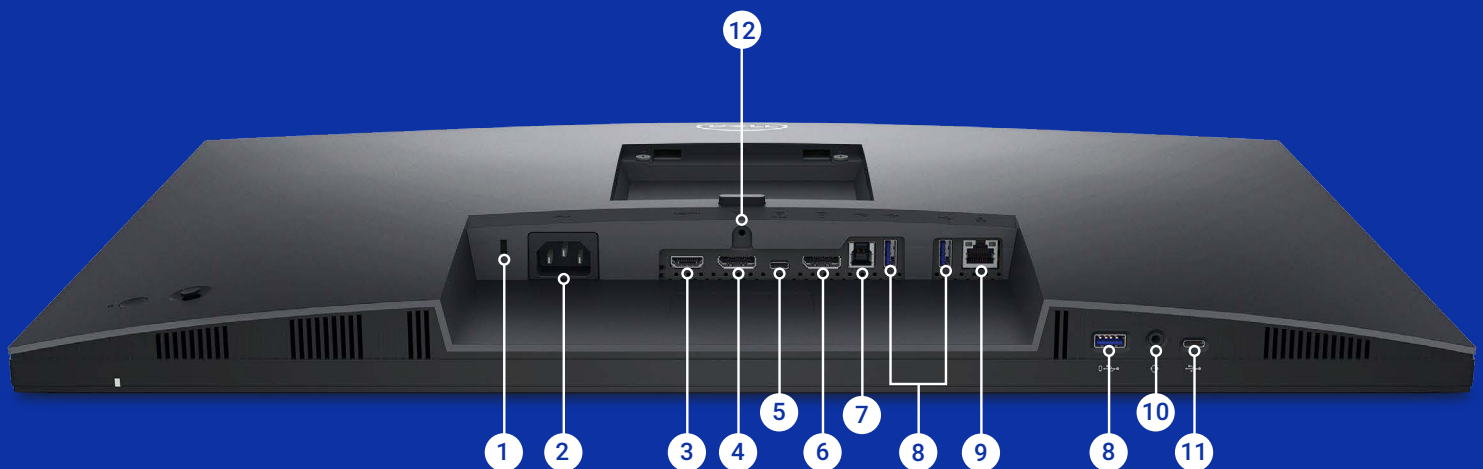

- 1** Security lock slot¹
- 2** Power connector
- 3** HDMI
- 4** DisplayPort 1.4
- 5** USB 3.2 Gen1 Type-C upstream
- 6** DP-out
- 7** USB 3.2 Gen1 Type-B upstream

- 8** USB 3.2 Gen1 Type-A downstream
- 9** RJ45
- 10** 3.5mm headphone jack
- 11** USB 3.2 Gen1 Type-C downstream
- 12** Stand lock feature

¹ Based on Kensington Security Slot™

FEATURE	TECHNICAL SPECIFICATION
MODEL	Dell 27 Video Conferencing Monitor - P2724DEB
DIAGONAL VIEWING SIZE	68.47 cm (27.0")
PANEL TYPE	In-Plane Switching (IPS) technology
VIEWING ANGLES	178° vertical / 178° horizontal
DISPLAY SCREEN COATING	Anti-glare treatment of front polarizer (3H) hard-coating
MAXIMUM PRESET RESOLUTION	QHD (2560 x 1440) at 60 Hz
ASPECT RATIO	16:9
PIXEL PITCH	0.2331 mm x 0.2331 mm
PIXEL PER INCH (PPI)	109
BRIGHTNESS	350 cd/m ² (typ)
CONTRAST RATIO	1,000:1 (typical)
BACKLIGHT TECHNOLOGY	LED
RESPONSE TIME	5ms gray to gray (fast) 8ms gray to gray (normal)
COLOR GAMUT	99% sRGB
COLOR DEPTH	Up to 16.7 million
LOW BLUE LIGHT	Yes, TÜV-certified ComfortView Plus
FLICKER-FREE	Yes, TÜV-certified Flicker-free
CONNECTIVITY	<ul style="list-style-type: none"> • 1 x HDMI¹ (HDCP 1.4) • 1 x DP 1.4 (HDCP 1.4) • 1 x DP-out with MST • 1 x RJ45 • 1 x 3.5mm combo headphone with microphone jack • 1 x USB 3.2 Gen1 Type-C (Alt mode with DP 1.4 upstream, up to 90W power delivery) • 1 x USB 3.2 Gen1 Type-B upstream • 2 x USB 3.2 Gen1 Type-A downstream • 1 x USB 3.2 Gen1 Type-C downstream with up to 15W power delivery • 1 x USB 3.2 Gen1 Type-A downstream with BC1.2 (2A max)
ADJUSTABILITY	Height, tilt, swivel, and pivot
HEIGHT ADJUSTMENT	Up to 150mm (5.9")
TILT ANGLE	-5° / 21°
SWIVEL ANGLE	Bi-directional 45° / 45°
PIVOT ANGLE	Bi-directional 90° / 90°
VESA MOUNTING INTERFACE	100mm x 100mm
BUILT-IN CAMERA	1 x 4MP RGB + IR 2K camera at 30 fps (FHD at 60 fps)
BUILT-IN MICROPHONES	2 x digital microphone
BUILT-IN SPEAKER	2 x 5W

FEATURE	TECHNICAL SPECIFICATION
AUTO KVM	Yes
DAISY-CHAIN	Yes, supports Multi-Stream Transport (MST) and Multi-Monitor Sync (MMS)
OTHERS	Dell Power Button Sync (DPBS)
INCLUDED SOFTWARE	Dell Display Manager
SECURITY LOCK SLOT	Yes, based on Kensington Security Slot™
VOLTAGE REQUIRED	100 VAC ~ 240 VAC / 50 Hz or 60 Hz ± 3 Hz / 2.5 A (max)
POWER CONSUMPTION	0.3W (Off mode) 0.3W (Standby mode) 0.9W (Networked standby mode) 26.0W (On mode) 210W (Max)
DIMENSIONS (H X W X D) - FULL MONITOR	440.79 mm x 611.78 mm x 230.00 mm (17.35" x 24.09" x 9.10")
DIMENSIONS (H X W X D) - PANEL ONLY (FOR VESA MOUNTING)	415.82 mm x 611.78 mm x 59.61 mm (16.37" x 24.09" x 2.35")
WEIGHT - FULL MONITOR	8.27 kg (18.2 lbs)
WEIGHT - PANEL ONLY (FOR VESA MOUNTING)	5.65 kg (12.46 lbs)
ENERGY STAR CERTIFIED	Yes
EPEAT COMPLIANT	Gold
TCO CERTIFIED	TCO 9 and TCO Certified Edge
RoHS COMPLIANT	Yes
TEMPERATURE RANGE	Operating: 0°C ~ 40°C (32°F ~ 104°F)
HUMIDITY RANGE	Operating: 10% ~ 80% (non-condensing)
WHAT'S INCLUDED	1x Monitor panel 1x Stand riser 1x Stand base 1x Power cable 1x DP-to-DP cable (1.8m) 1x USB 3.2 Gen2 Type C-to-C cable (1.0m) 1x USB 3.2 Gen1 Type A-to-B upstream cable (1.8m) 1x Quick setup guide 1x Safety, Environmental, and Regulatory Information
STANDARD WARRANTY	3-year Limited Hardware Warranty with Advanced Exchange Service and Premium Panel Exchange

¹ Supports up to QHD 2560x1440 at 60Hz as per specified in HDMI 1.4.